



Bobcat®

Compact Equipment Tires



One Tough Animal™

Bobcat Compact Loader Pneumatic Tires



Severe Duty

When your jobsite demands an aggressive long-lasting tire, choose the Bobcat® severe duty tire. It's designed to take on more abuse than conventional tires, as well as provide superior self cleaning characteristics.

The deep tread depth significantly increases the tires' service life, while reducing downtime due to cuts and punctures. Bobcat severe duty tires are proven performers in construction, recycling, industrial, rental, and other severe job applications.

- High ply-ratings to minimize flats
- 44/32 inch tread depth, deep tread to maximize life
- 68% solid-to-void tread ratio, excellent on aggressive surfaces
- Strong sidewall protection against cuts and punctures



Heavy Duty

Increase your protection against punctures and cracks with the extra thick sidewalls on Bobcat heavy duty tires. They feature bead guards to shield against rim and sidewall punctures. The combination of superior quality, self-cleaning rubber, and high ply rating make these tires ideal for rough, high-hour applications such as rental, construction, landscaping and industrial jobs.

- Strong, durable tread compound resists chunking and separation
- Special bead guard offers great tire and rim protection
- Bobcat 3-step, self-cleaning tread for excellent traction
- Better wear and resistance to flats



Standard Duty

Designed for maximum traction and grip, the center lug of the Bobcat standard duty tire adds extra traction. These tires are created for long wear during normal machine-hour applications, such as agriculture, rental, landscaping, and general construction. The special rim guard and thick sidewalls provide outstanding protection against punctures. They're constructed with a unique blend of natural and synthetic rubber.

- Durable tread compound prevents downtime and increases productivity
- Thick sidewalls for greater puncture resistance
- Special rim guard for tire and wheel protection



Turf & Sand

Outfit your equipment with Bobcat turf & sand tires which offer excellent traction while minimizing damage and repairs to lawns. This tire works well when you need to be extra ground-conscious: golf courses, sugar sand, nurseries and landscaping.

Super Float

Keep moving in soft and wet soil conditions with Bobcat super float tires. They feature super wide tread and heavy sidewalls. At the recommended air pressure, these tires provide up to 85% more footprint area than conventional tires. These tires are ideal when working in parks, cemeteries, golf courses, nurseries, beaches and compost yards.



| Model | Tire Size | Part No. | Type | Outside Diameter | | Tire Width | | Rim Diameter | | Ply Rating | Rated Load lb. @ psi | Tread Depth | | Tire Weight | |
|--------------------------------------|-------------|-----------|----------|------------------|-----|------------|-----|--------------|------|------------|-------------------------|-------------|----|-------------|-----|
| | | | | in. | mm | in. | mm | in. | mm | | | 32nds | mm | lb. | kg. |
| Skid-Steer Loader | 5.7 x 12 | 7210943 | Standard | 23 | 584 | 5.7 | 145 | 12 | 305 | 4 | 1455 @ 60 | 15 | 12 | 15 | 7 |
| | 8.5 x 12 | 6661602 | Heavy | 23 | 584 | 8.5 | 216 | 12 | 305 | 6 | 1810 @ 50 | 13 | 10 | 26 | 12 |
| | 8.5 x 15 | 6729895 | Standard | 27 | 686 | 8.5 | 216 | 15 | 381 | 4 | 1940 @ 50 | 12 | 10 | 27 | 12 |
| | | 6661603 | Standard | 27 | 686 | 8.5 | 216 | 15 | 381 | 6 | 2270 @ 50 | 13 | 10 | 33 | 15 |
| | | 6667890 | Heavy | 27 | 686 | 8.5 | 216 | 15 | 381 | 8 | 2890 @ 60 | 15 | 12 | 38 | 17 |
| | 10.5 x 15 | 6680056 | Standard | 27 | 686 | 10.5 | 254 | 15 | 381 | 6 | 2610 @ 45 | 17 | 14 | 34 | 15 |
| | | 10 x 16.5 | 6730106 | Severe | 31 | 787 | 10 | 254 | 16.5 | 419 | 10 | 3500 @ 45 | 44 | 35 | 76 |
| 6729900 | | | Heavy | 31 | 787 | 10 | 254 | 16.5 | 419 | 10 | 3930 @ 55 | 19 | 15 | 50 | 22 |
| | | 6729896 | Standard | 31 | 787 | 10 | 254 | 16.5 | 419 | 8 | 3930 @ 55 | 18 | 14 | 80 | 36 |
| Skid-Steer Loader or All-Wheel Steer | 12 x 16.5 | 6730108 | Severe | 33 | 838 | 12 | 305 | 16.5 | 419 | 12 | 4210 @ 40 | 44 | 35 | 85 | 39 |
| | | 6729901 | Heavy | 33 | 838 | 12 | 305 | 16.5 | 419 | 12 | 5355 @ 60 | 21 | 17 | 77 | 35 |
| | | 7219732 | Heavy | 33 | 838 | 12 | 305 | 16.5 | 419 | 10 | 5600 @ 65 | 22 | 17 | 79 | 36 |
| | | 6729897 | Standard | 33 | 838 | 12 | 305 | 16.5 | 419 | 10 | 5350 @ 60 | 21 | 17 | 64 | 29 |
| | | 7211382* | Float | 31 | 787 | 12 | 305 | 16.5 | 419 | 10 | 4460 @ 55 | 19 | 15 | 62 | 28 |
| | 15.5 x 16.5 | 6678044* | Turf | 33 | 838 | 15.5 | 394 | 16.5 | 419 | 10 | 4730 @ 32 | 18 | 14 | 80 | 36 |
| | | 6730109* | Float | 33 | 838 | 15.5 | 394 | 16.5 | 419 | 12 | 4990 @ 35 | 26 | 21 | 94 | 43 |
| Skid-Steer Loader | 14 x 17.5 | 7139189 | Severe | 36 | 914 | 14 | 356 | 17.5 | 445 | 14 | 5260 @ 35 | 44 | 35 | 130 | 59 |
| | | 6675541 | Heavy | 36 | 914 | 14 | 356 | 17.5 | 445 | 14 | 8550 @ 80 | 24 | 19 | 102 | 46 |
| | | 6667794 | Standard | 36 | 914 | 14 | 356 | 17.5 | 445 | 10 | 6850 @ 55 | 24 | 19 | 92 | 42 |

*See your local Bobcat dealer for complete details on rim requirements.

Bobcat Compact Loader Solid Tires



Eliminate downtime and money spent due to flat tires and enjoy longer tire life with Bobcat Solid Tires.

Bobcat Solid Tires

Designed to last at least three times longer than foam-filled pneumatic tires, Bobcat solid tires are made from an ultra tough, enhanced rubber mining compound. With a tear strength that is more than double the strength of most pneumatic tires, you will experience better resistant to cutting and chunking from debris. Bobcat solid tires are bonded to steel rims and ready to mount on your machine.

Twin Flex

Enjoy the durability of solid tires with the feel of a pneumatic tire ride provided by patented tear drop holes. Designed to reduce vibration and increase driver comfort, the progressive design of the tear drop holes maintain a circular shape under weight to resist stress point cracking, and increases overall tire life. Features R-4 deep traction tread design with self cleaning stepped lugs. Agile tread design provides incredible traction.



Smooth Flex

Bobcat smooth flex tires provide the extended life of a solid tire, along with the feel of a cushioned ride foam filled pneumatic tire. An elliptical row of holes in the side reduces load stress on the tire and eliminates cracking. Larger contact surface of the smooth tread allows for more even wear and better traction. Well-suited for dry, hard compact surfaces.



Smooth & All Terrain Solid

Bobcat solid smooth tires are well-suited for dry, hard compact surface applications. Bobcat's all terrain tread design provides the ability to channel water away from the tires on wet surfaces. These tires are well-suited for dry or wet, hard compact surface applications.



| Model | Style | Pneumatic Equivalent | Part No. | Base | Rim Color | Bolt Circle | | Outside Dia. | | Tire Width | | Rim Dia. | | Tread Depth | | Rated Load | | Weight | | | | | | | | | |
|-------------------|----------------------|----------------------|----------|-------------|-----------|-------------|--------|--------------|-----|------------|------|----------|------|-------------|------|------------|------|--------|-----|-----|------|-----|-----|------|------|-----|-----|
| | | | | | | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | lb. | kg. | | | | | | | | | | |
| Skid-Steer Loader | Twin Flex | 10 x 16.5 | 6903766 | Left | Orange | 8 | 200 | 31 | 787 | 10 | 254 | 18.5 | 470 | 1.9 | 48.3 | 7530 | 246 | 112 | | | | | | | | | |
| | | | 6903767 | Right | | | | 33 | 838 | 11 | 279 | | | 2.4 | 61 | | | | | | | | | | | | |
| | | 12 x 16.5 | 6903773 | Left | | Grey | 8 | 200 | 33 | 838 | 11 | 279 | 20.7 | 526 | 2.4 | 61 | 7915 | 280 | 127 | | | | | | | | |
| | | | 6903774 | Right | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 7236254 | Left | | | Orange | 8 | 200 | 33 | 838 | 11 | 279 | 20.7 | 526 | 2.4 | 61 | 7915 | 280 | 127 | | | | | | | |
| | | | 7236255 | Right | | | | | | | | | | | | | | | | | | | | | | | |
| | 14 x 17.5 | 6988042 | Left | Orange | 8 | 200 | 36 | 914 | 11 | 279 | 22.7 | 577 | 2.8 | 71.1 | 8540 | 325 | 147 | | | | | | | | | | |
| | | 6988043 | Right | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 7001446 | Left | | Grey | 10.75 | 269 | 36 | 914 | 11 | 279 | 22.7 | 577 | 2.8 | 71.1 | 8540 | 325 | 147 | | | | | | | | | |
| | | 7001447 | Right | | | | | | | | | | | | | | | | | | | | | | | | |
| | 7236256 | Left | Grey | 8 | 200 | 36 | 914 | 11 | 279 | 22.7 | 577 | 2.8 | 71.1 | 8540 | 325 | 147 | | | | | | | | | | | |
| | 7236257 | Right | | | | | | | | | | | | | | | | | | | | | | | | | |
| All-Wheel Steer | Twin Flex | 12 x 16.5 | 6904633 | Left | Orange | 10.75 | 269 | 33 | 838 | 11 | 279 | 20.7 | 526 | 2.4 | 61 | 7915 | 280 | 127 | | | | | | | | | |
| | | | 6904634 | Right | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 7024824 | Left | Grey | | | 8 | 200 | 33 | 838 | 11 | 279 | 20.7 | 526 | 2.4 | 61 | 7915 | 280 | 127 | | | | | | | |
| | | | 7024823 | Right | | | | | | | | | | | | | | | | | | | | | | | |
| Skid-Steer Loader | Twin Flex Offset Rim | 10 x 16.5 | 6904637 | Left | Orange | 8 | 200 | 31 | 787 | 10 | 254 | 18.5 | 470 | 1.9 | 48.3 | 7335 | 254 | 115 | | | | | | | | | |
| | | | 6904638 | Right | | | | | | | | | | | | | | | | | | | | | | | |
| | | 12 x 16.5 | 6904635 | Left | | Grey | 8 | 200 | 33 | 838 | 11 | 279 | 20.7 | 526 | 2.4 | 61 | 7915 | 280 | 127 | | | | | | | | |
| | | | 6904636 | Right | | | | | | | | | | | | | | | | | | | | | | | |
| | Smooth Flex | 10 x 16.5 | 6904630 | Wide Base | Grey | 8 | 200 | 31 | 787 | 9 | 229 | 20.7 | 526 | 2.4 | 61 | 5920 | 225 | 102 | | | | | | | | | |
| | | | 800-16 | Narrow Base | | | | | | | | | | | | | | | 8 | 203 | 20.7 | 526 | 2.4 | 61 | 5500 | 232 | 105 |
| | | | 6904632 | Wide Base | | | | | | | | | | | | | | | 8 | 200 | 33 | 838 | 10 | 254 | 20.7 | 526 | 2.4 |
| | Smooth Solid | 750-16 | 6903935 | Narrow Base | Orange | 8 | 200 | 31 | 787 | 7 | 178 | 20.7 | 526 | 2.9 | 73.7 | 5510 | 198 | 90 | | | | | | | | | |
| | | | 6903937 | | | | | | | | | | | | | | | | 8 | 203 | 20.7 | 526 | 2.4 | 61 | 7330 | 268 | 122 |
| | | 10 x 16.5 | 6903939 | Wide Base | | 8 | 200 | 31 | 787 | 9 | 229 | 20.7 | 526 | 2.9 | 73.7 | 7410 | 242 | 110 | | | | | | | | | |
| | | | 6903941 | | | | | | | | | | | | | | | | 8 | 200 | 33 | 838 | 10 | 254 | 20.7 | 526 | 2.4 |
| | | 12 x 16.5 | 7025304 | Wide Base | | 10.75 | 269 | 33 | 838 | 10 | 254 | 20.7 | 526 | 2.4 | 61 | 8150 | 320 | 145 | | | | | | | | | |
| | | | 7025305 | | | | | | | | | | | | | | | | 8 | 200 | 33 | 838 | 11 | 279 | 22.7 | 526 | 4.7 |
| | All Terrain Solid | 750-16 | 6903936 | Narrow Base | Orange | 8 | 200 | 31 | 787 | 7 | 178 | 20.7 | 526 | 2.9 | 73.7 | 5510 | 192 | 87 | | | | | | | | | |
| | | | 6903938 | | | | | | | | | | | | | | | | 8 | 200 | 33 | 838 | 8 | 203 | 20.7 | 526 | 2.4 |
| | | 10 x 16.5 | 6903940 | Wide Base | | 8 | 200 | 31 | 787 | 9 | 229 | 20.7 | 526 | 2.9 | 73.7 | 7410 | 242 | 110 | | | | | | | | | |
| 6903942 | | | 8 | | | | | | | | | | | | | | | | 200 | 33 | 838 | 10 | 254 | 20.7 | 526 | 2.4 | 61 |

EarthForce Compact Loader Tires



Severe Duty

The reinforced sidewalls protect the EarthForce™ non-directional tire against costly sidewall damage. The extra wide foot print provides high flotation and super stability, while the thick ply ratings add extra durability.

Standard Duty

The EarthForce standard duty tire features a durable tread pattern for high flotation and great stability. They are designed for resistance to chunking and tearing.

| Tire Size | Part No. | Type | Outside Dia. | | Tire Width | | Rim Diameter | | Ply Rating | Rated Load lb. @ psi | Tread Depth | | Tire Weight | |
|-----------|----------|--------|--------------|-----|------------|-----|--------------|-----|------------|-------------------------|-------------|----|-------------|------|
| | | | in. | mm | in. | mm | in. | mm | | | 32nds | mm | lb. | kg. |
| 10 x 16.5 | 6988143 | Severe | 31 | 787 | 10 | 254 | 16.5 | 419 | 12 | 5095 @ 87 | 34 | 27 | 77 | 35 |
| | 6988500 | Stand. | 31 | 787 | 10 | 254 | 16.5 | 419 | 8 | 4145 @ 61 | 16 | 13 | 47 | 21 |
| | 7024212 | Heavy | 31 | 787 | 10 | 254 | 16.5 | 419 | 12 | 5225 @ 90 | 21 | 17 | 63 | 28.5 |
| 12 x 16.5 | 6988144 | Severe | 33 | 838 | 12 | 305 | 16.5 | 419 | 14 | 6195 @ 81 | 42 | 34 | 94 | 43 |
| | 6988501 | Stand. | 33 | 838 | 12 | 305 | 16.5 | 419 | 10 | 5335 @ 61 | 19 | 15 | 59 | 27 |
| | 7024213 | Heavy | 33 | 838 | 12 | 305 | 16.5 | 419 | 14 | 6765 @ 90 | 26 | 21 | 88 | 40 |
| 14 x 17.5 | 6988145 | Severe | 36 | 922 | 14 | 356 | 17.5 | 445 | 14 | 8545 @ 80 | 48 | 38 | 145 | 66 |
| | 6988502 | Stand. | 36 | 922 | 14 | 356 | 17.5 | 445 | 16 | 8860 @ 91 | 22 | 18 | 112 | 51 |




EarthForce™

EarthForce Solid Press-on

With sidewalls that are designed to prevent cuts and cracks in aggressive terrain, EarthForce solid press-on tires offer a durable, cost efficient solution for your equipment. The air-cushioned ride eases machine shock for maximum performance and driver comfort with a partially pneumatic tire design. They are created with heavy duty rubber compounds for increased service life.

- Deep lug treads provide traction in an assortment of terrains
- Great shock absorption for machine longevity and operator comfort
- Super smooth tires also feature air-cushioned design
- Rimless replacement tires available

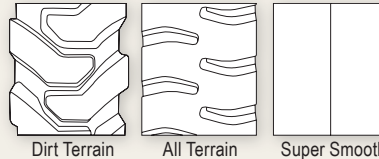

| Style | Pneumatic Equivalent | Part No. | Base | Bolt Circle | | Outside Dia. | | Tire Width | | Rim Dia. | | Tread Depth | | No. of Bolt Holes | Rated Load | | Weight | |
|--|----------------------|------------|-------|-------------|-----|--------------|-----|------------|-----|----------|-----|-------------|--------|-------------------|------------|-----|--------|-----|
| | | | | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | | in. | mm | lb. | lb. |
| Dirt Terrain with Rim | 8.5 x 12 | 7023560 | Left | 8 | 200 | 23 | 584 | 8 | 203 | 12 | 305 | 0.8 | 20 | 5 | 3310 | 101 | 46 | |
| | | 7023561 | Right | | | | | | | | | | | | | | | |
| Dirt Terrain with Rim | 8.5 x 15 | 7023562 | Left | 8 | 200 | 27 | 686 | 8 | 203 | 15 | 381 | 0.8 | 20 | 6 | 4410 | 143 | 65 | |
| | | 7023563 | Right | | | | | | | | | | | | | | | |
| Dirt Terrain without Rim | 8.5 x 15 | 6988682 | - | - | - | 30 | 762 | 8 | 203 | - | - | 1.5 | 38 | 6 | 4190 | 160 | 72.5 | |
| Dirt Terrain with Rim | | 6988683*** | Left | 8 | 200 | | | | | 16 | 406 | | | | | | | |
| Dirt Terrain with Rim | 8.5 x 16 | 6988680 | Left | 10.75 | 269 | 30 | 762 | 8 | 203 | 16 | 406 | 1.5 | 38 | 8 | 4190 | 160 | 72.5 | |
| Dirt Terrain with Rim | | 6988681 | Right | | | | | | | | | | | | | | | |
| Orange Non-Marking Dirt Terrain with Rim | 10 x 16.5 | 7022983 | Left | 8 | 200 | 30 | 762 | 10 | 254 | 16 | 406 | 1.5 | 38 | 8 | 4850 | 180 | 81.5 | |
| Dirt Terrain with Rim | | 7022984 | Right | | | | | | | | | | | | | | | |
| Dirt Terrain with Rim | | 6988512 | Left | | | | | | | | | | | | | | | |
| Dirt Terrain with Rim | 10 x 16.5 | 6988513 | Right | 10.75 | 269 | 30 | 762 | 10 | 254 | 16 | 406 | 1.5 | 38 | 8 | 4850 | 180 | 81.5 | |
| Dirt Terrain without Rim | | 6988514 | - | | | | | | | | | | | | | | | - |
| Super Smooth without Rim | 10 x 16.5 | 6988511 | - | - | - | 31.5 | 800 | 8 | 203 | - | - | no lug | no lug | - | 5370 | 215 | 97.5 | |
| Super Smooth with Rim | | 6988510 | - | - | - | | | | | 16 | 406 | | | | | | | 8 |
| Dirt Terrain with Rim | 12 x 16.5 | 6988524 | Left | 8 | 200 | 32.25 | 820 | 15 | 381 | 16 | 406 | 2.5 | 57 | 8 | 11,020 | 350 | 157.5 | |
| Dirt Terrain with Rim | | 6988525 | Right | | | | | | | | | | | | | | | |
| Dirt Terrain without Rim | | 6988526 | - | | | | | | | | | | | | | | | - |
| Dirt Terrain with Rim | 12 x 16.5 | 6988515 | Left | 8 | 200 | 33 | 838 | 12 | 305 | 16 | 406 | 2 | 51 | 8 | 8270 | 250 | 113 | |
| Dirt Terrain with Rim | | 6988516 | Right | | | | | | | | | | | | | | | |
| Dirt Terrain without Rim | | 6988517 | - | | | | | | | | | | | | | | | - |
| Dirt Terrain with Rim | 12 x 16.5 | 7024824 | Left | 8 | 200 | 33 | 838 | 12 | 305 | 16 | 406 | 2 | 51 | 8 | 8250 | 270 | 123 | |
| Dirt Terrain with Rim | | 7024823 | Right | | | | | | | | | | | | | | | |
| Orange Non-Marking Dirt Terrain with Rim | | 7022985 | Left | | | | | | | | | | | | | | | |
| Dirt Terrain with Rim | 12 x 16.5 | 7022986 | Right | 8 | 200 | 33 | 838 | 12 | 305 | 16 | 406 | 2 | 51 | 8 | 8270 | 250 | 113 | |
| All Terrain with Rim | | 6988518 | - | | | | | | | | | | | | | | | - |
| All Terrain without Rim | 12 x 16.5 | 6988520 | - | - | - | 33 | 838 | 12 | 305 | 16 | 406 | 2.67 | 56 | 8 | 8270 | 229 | 104 | |
| Dirt Terrain without Rim | | 6988523 | - | - | - | | | | | | | | | | | | | |
| Dirt Terrain with Rim | 14 x 17.5 | 6988521 | Left | 8 | 200 | 36.5 | 927 | 14 | 356 | 20 | 508 | 2 | 51 | 8 | 10,580 | 420 | 190.5 | |
| Dirt Terrain with Rim | | 6988522 | Right | | | | | | | | | | | | | | | |
| Dirt Terrain with Rim | 14 x 17.5 | 7024853 | Left | 8 | 200 | 36.5 | 927 | 14 | 356 | 20 | 508 | 2 | 51 | 8 | 10,580 | 436 | 198 | |
| Dirt Terrain with Rim | | 7024854 | Right | | | | | | | | | | | | | | | |

Equipment height may vary with some styles of EarthForce solid press-on tires. ***See your Bobcat dealer for rimless replacement tires and complete details on rim requirements.



Choosing the right tire is important for machine traction, flotation, wear, and overall performance. Tires with the correct height, width, and ply rating maintain the proper operating efficiency and ensure support of maximum loads. You can depend on genuine Bobcat tires for performance, reliability, and superior results in a variety of job conditions.

Toolcat, Utility Vehicle, and VersaHandler Tires



Toolcat® Utility Work Machine

In the park or on the farm, Bobcat® Toolcat tires provide rider comfort with maximum performance. Choose from general purpose tires for use in a variety of applications, turf tires for landscaping applications, or the float tire when good flotation is needed along with traction.

| Model | Style | Part No. | Type | Outside Dia. | | Tire Width | | Rim Diameter | | Ply Rating | Rated Load lb. @ psi | Weight | |
|----------------------|-----------------|----------|----------|--------------|-----|------------|-----|--------------|-----|------------|-------------------------|--------|-----|
| | | | | in. | mm | in. | mm | in. | mm | | | lb. | kg. |
| 5600 | General | 6680056 | Standard | 27 | 686 | 10.5 | 267 | 15 | 381 | 6 | 2610 @ 45 | 33 | 15 |
| | Turf | 6682461 | Standard | 27 | 686 | 10.5 | 267 | 15 | 381 | 10 | 2200 @ 75 | 38 | 17 |
| 5600 5610 | General Purpose | 7023289 | Standard | 27 | 686 | 10.5 | 267 | 15 | 381 | 8 | 3130 @ 60 | 43 | 19 |
| | | 7023288 | Standard | 29 | 737 | 10.5 | 267 | 15 | 381 | 10 | 4470 @ 75 | 47 | 21 |
| | Turf | 7166360 | Standard | 29 | 737 | 12.5 | 318 | 15 | 381 | 8 | 2150 @ 45 | 48 | 22 |



Turf

Utility Vehicle

Whether you're hitting the trail or hauling a load, Bobcat offers a selection of tire styles to fit the different applications of your Bobcat utility vehicle.

| Model | Style | Part No. | Type | Outside Dia. | | Tire Width | | Rim Diameter | | Ply Rating | Rated Load lb. @ psi | Weight | |
|--|-------------|-----------------|--------|--------------|-----|------------|-----|--------------|-----|------------|-------------------------|--------|-----|
| | | | | in. | mm | in. | mm | in. | mm | | | lb. | kg. |
| 2100, 2100S, 2200, 2200H | All Terrain | 102021302CC | Stand. | 23 | 584 | 12 | 305 | 12 | 305 | 4 | 1340 @ 20 | 24 | 11 |
| 2100, 2100S | Turf | 102021307CC | Stand. | 23 | 584 | 10.5 | 267 | 12 | 305 | 4 | 1340 @ 10 | 13 | 6 |
| 2200, 2200H | Mud Tread | 102021306CC | Stand. | 23 | 584 | 12 | 305 | 12 | 305 | 4 | 1200 @ 22 | 17 | 8 |
| 2200, 2200BH, 2200S, 2300 | All Terrain | 102943101CC | Stand. | 25 | 635 | 12 | 305 | 12 | 305 | 4 | 1570 @ 20 | 25 | 11 |
| | Mud Tread | 102945701CC | Stand. | 25 | 635 | 12 | 305 | 12 | 305 | 4 | 1480 @ 22 | 21 | 9.5 |
| 3200, 3400, 3400XL, 3450 | All Terrain | 7019207 - Front | Stand. | 25 | 635 | 12 | 305 | 8 | 203 | 4 | 420 @ 7 | 19 | 9 |
| | Turf | 6989065 - Front | Stand. | 25 | 635 | 9.5 | 241 | 8 | 203 | 4 | 1520 @ 24 | 18 | 8 |
| | All Terrain | 7019208 - Rear | Stand. | 25 | 635 | 12 | 305 | 8 | 203 | 4 | 455 @ 7 | 21 | 9.5 |
| | Turf | 6989066 - Rear | Stand. | 25 | 635 | 11 | 279 | 8 | 203 | 4 | 1820 @ 24 | 22 | 10 |



All Terrain

VersaHandler TTC

The stability, balance, and traction offered by our engineering approved tire is crucial to the proper operation of your Bobcat VersaHandler telescopic tool carrier.

| Model | Part No. | Type | Outside Dia. | | Tire Width | | Rim Diameter | | Ply Rating | Rated Load lb. @ psi | Weight | |
|-------------------------|----------|---------------|--------------|------|------------|-----|--------------|-----|------------|-------------------------|--------|-----|
| | | | in. | mm | in. | mm | in. | mm | | | lb. | kg. |
| V417 | 6920685 | Standard | 35 | 889 | 14 | 356 | 17.5 | 445 | 14 | 5357 @ 80 | 80 | 36 |
| V638 | 7022696 | Standard | 50 | 1270 | 13 | 330 | 24 | 610 | 12 | 12,300 @ 65 | 161 | 73 |
| V518, V723 | 6909321 | Standard | 42 | 1067 | 15.5 | 394 | 20 | 508 | 10 | 7400 @ 61 | 163 | 74 |
| V518, V623, V723 | 7160222 | Ag/Industrial | 42 | 1067 | 16 | 406 | 20 | 508 | 15 | 7385 @ 58 | 157 | 71 |
| V638, V723 | 7144224 | Ag/Industrial | 49 | 1245 | 15.8 | 401 | 24 | 610 | - | 8818 @ 69 | 198 | 89 |
| V723 | 6909327 | Ag/Industrial | 50 | 1270 | 15.5 | 394 | 24 | 610 | 14 | 7605 @ 69 | 150 | 68 |



Ag/Industrial

Measurements are in inches unless otherwise noted. Some measurements have been rounded to the nearest number. Use tires with the correct load rating for proper operation. IMPORTANT: Inflate tires to the maximum pressure shown on the sidewall of the tire. Do not inflate the tires above the recommended pressures shown in the Operation & Maintenance Manual, or on the side of the tire. Check tire pressure frequently and always maintain the correct tire pressure. WARNING: AVOID INJURY OR DEATH. Do not inflate tires above specified pressure. DO NOT mix brands of tires used on the same equipment. Check tires regularly for wear, damage and pressure. The rim flange must be cleaned and free of rust. WARNING: AVOID INJURY OR DEATH. Do not attempt to mount, or repair, a tire on the rim. This must be done by qualified personnel with the proper equipment. Failure to use correct tire mounting procedure can cause an explosion which can result in injury or death.

**See your local Bobcat dealer for complete details on rim requirements on all Bobcat compact tractor tires. See your Compact Tractor Operation & Maintenance Manual for more information regarding tire load rating requirements and recommended tire inflation pressures for your Compact Tractor.



Printed in the U.S.A.
P005 (E15)

Bobcat Parts
P.O. Box 5556 Bismarck, ND 58506
www.bobcat.com

